


# FP 55 / FK 55

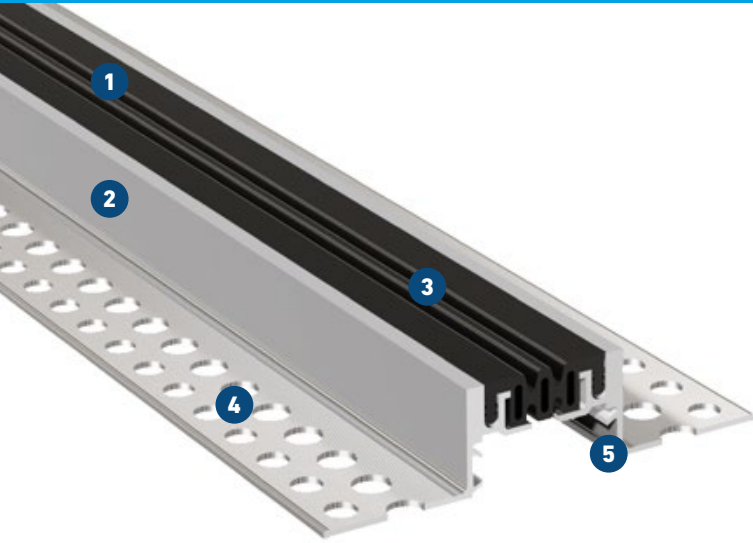

FOR FLOORS AND WALLS

# MIGUTEC

JOINT COVERS FOR EXPANSION JOINTS



- 1 Flexible high quality elastomeric insert**  
Hard wearing, temperature resistant (-30°C to +120°C), replaceable  
available in flush version and with 3 mm upstand (as FK 55)
- 2 High load capacity due to sturdy construction**  
Solid aluminium brackets
- 3 Multi directional movement**
- 4 MultiHole mounting bracket**  
for secure fixing
- 5 Quick and easy installation**  
Positive connection of production lengths by means of connection pieces

Expansion joint cover	Joint width	Total movement	Visible width	Joint width total	Joint height	Load bearing capacity  [kN]	Load bearing capacity*  [kN]
	$b_f \text{ max}$ [mm]	$\Delta b_f$ [mm]	$b_s$ [mm]	$b_t$ [mm]	$h$ [mm]		
FP 55/20	50	16 ( $\pm 8$ )	55	150	20	30	300
FP 55/25	50	16 ( $\pm 8$ )	55	150	25	30	300
FP 55/35	50	16 ( $\pm 8$ )	55	150	35	30	300
FP 55/50	50	16 ( $\pm 8$ )	55	150	50	30	300
FP 55/75	50	16 ( $\pm 8$ )	55	150	75	30	300

\* no continuous use

Larger installation heights on request.

For installation in asphalt, please ask for our technical advice.

FP 55 expansion joints are also available with a 3 mm upstand of the insert as FK 55 joints.

**Production length:** 4 m

**Standard colours FP 55:** black, grey, beige

**Standard colours FK 55:** black, grey

