


FP 55 / FK 55

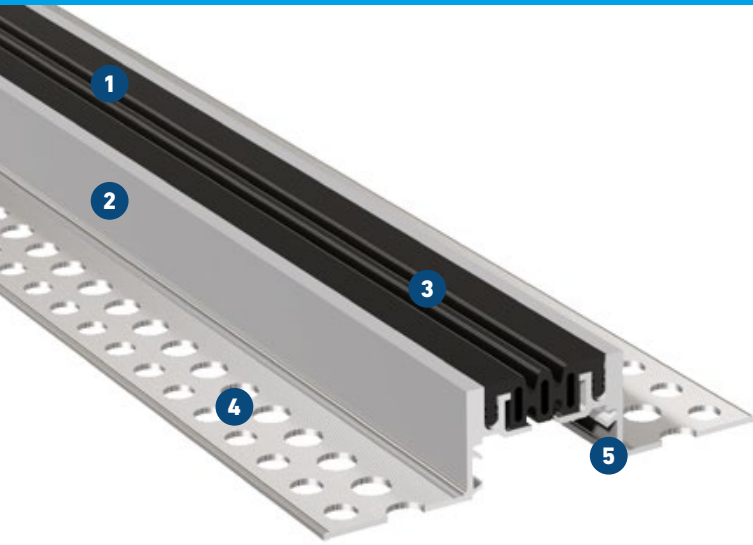

FOR FLOORS AND WALLS

MIGUTEC

JOINT COVERS FOR EXPANSION JOINTS



- 1 Flexible high quality elastomeric insert**
Hard wearing, temperature resistant (-30°C to +120°C), replaceable, available in flush version and with 3 mm upstand (as FK 55)
- 2 High load capacity due to sturdy construction**
Solid aluminium brackets
- 3 Multi directional movement**
- 4 MultiHole mounting bracket**
for secure fixing
- 5 Quick and easy installation**
Positive connection of production lengths by means of connection pieces

Expansion joint cover	Joint width	Total movement	Visible width	Joint width total	Joint height	Load bearing capacity	Load bearing capacity*
	$b_f \text{ max}$ [mm]	Δb_f [mm]	b_s [mm]	b_t [mm]	h [mm]	 [kN]	 [kN]
FP 55/20	50	16 (±8)	55	150	20	30	300
FP 55/25	50	16 (±8)	55	150	25	30	300
FP 55/35	50	16 (±8)	55	150	35	30	300
FP 55/50	50	16 (±8)	55	150	50	30	300
FP 55/75	50	16 (±8)	55	150	75	30	300

* no continuous use

For installation in asphalt, please ask for our technical advice.

FP 55 expansion joints are also available with a 3 mm upstand of the insert as FK 55 joints.

Larger installation heights on request.

Production length: 4 m

Standard colours FP 55: black, grey, beige

Standard colours FK 55: black, grey

Wall connections: E1, E3, E4

