


FP 55 MS / FP 55 NI

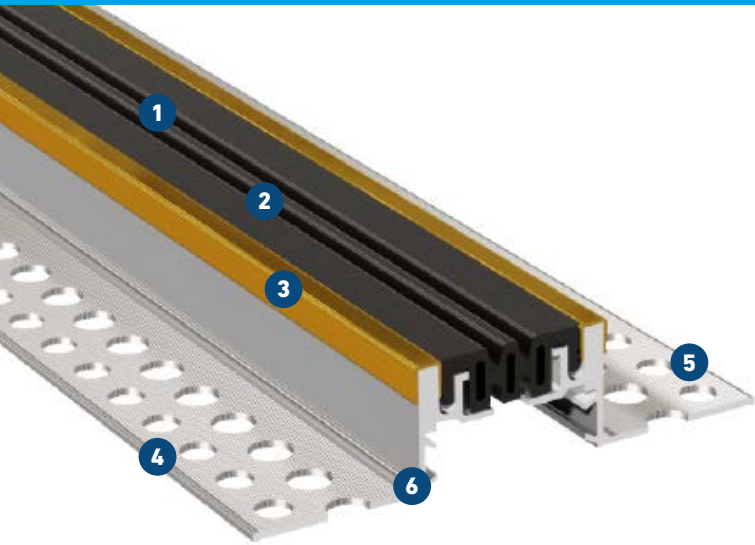

WITH CAPPINGS MADE OF STAINLESS STEEL OR BRASS

MIGUTEC

JOINT COVERS FOR EXPANSION JOINTS



- 1 Flexible high quality elastomeric insert**
Hard wearing, temperature resistant (-30°C to +120°C), replaceable
- 2 Multi directional movement**
- 3 Visible surface brass or stainless steel**
- 4 High load capacity due to sturdy construction**
Solid aluminium brackets
- 5 MultiHole mounting bracket**
for secure fixing
- 6 Quick and easy installation**
Positive connection of production lengths by means of connection pieces

Expansion joint cover	Joint width	Total movement	Visible width	Joint width total	Joint height	Load bearing capacity  [kN]	Load bearing capacity*  [kN]
	$b_f \text{ max}$ [mm]	Δb_f [mm]	b_s [mm]	b_t [mm]	h [mm]		
FP 55/21 NI	50	16 (± 8)	57	150	21	30	300
FP 55/26 NI	50	16 (± 8)	57	150	26	30	300
FP 55/36 NI	50	16 (± 8)	57	150	36	30	300
FP 55/51 NI	50	16 (± 8)	57	150	51	30	300
FP 55/76 NI	50	16 (± 8)	57	150	76	30	300
FP 55/21 MS	50	16 (± 8)	57	150	21	30	300
FP 55/26 MS	50	16 (± 8)	57	150	26	30	300
FP 55/36 MS	50	16 (± 8)	57	150	36	30	300
FP 55/51 MS	50	16 (± 8)	57	150	51	30	300
FP 55/76 MS	50	16 (± 8)	57	150	76	30	300

No continuous use

Larger installation heights on request.

For installation in asphalt, please ask for our technical advice.

Production length: 4 m

Standard colors: black, grey

