


FP 55 - 4S

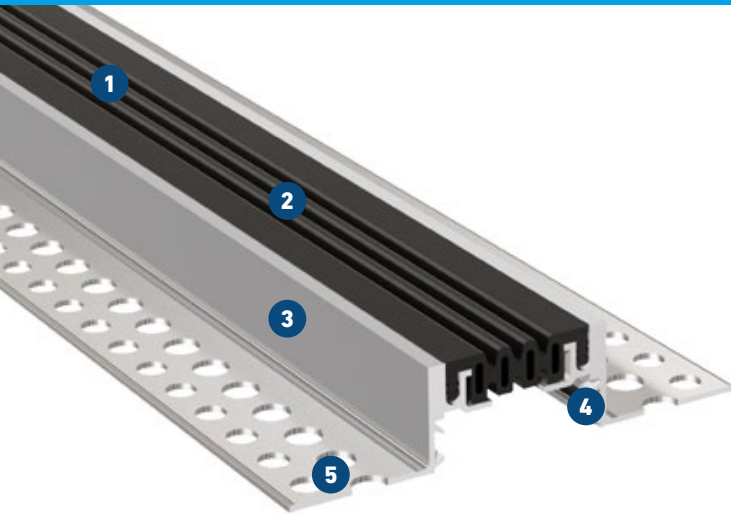

FOR FLOORS AND WALLS

MIGUTEC

JOINT COVERS FOR EXPANSION JOINTS



- 1 Flexible high quality elastomeric insert**
Hard wearing, temperature resistant (-30°C to +120°C), replaceable
- 2 Multi directional movement**
- High load capacity due to sturdy construction**
Solid aluminium brackets
- 3 Quick and easy installation**
Positive connection of production lengths by means of connection pieces
- 4 MultiHole mounting bracket**
for secure fixing
- 5**

Expansion joint cover	Joint width	Total movement	Visible width	Joint width total	Joint height	Load bearing capacity  [kN]	Load bearing capacity*  [kN]
	$b_f \text{ max}$ [mm]	Δb_f [mm]	b_s [mm]	b_t [mm]	h [mm]		
FP 55/20 4S	58	22 (± 11)	63	158	20	30	300
FP 55/25 4S	58	22 (± 11)	63	158	25	30	300
FP 55/35 4S	58	22 (± 11)	63	158	35	30	300
FP 55/50 4S	58	22 (± 11)	63	158	50	30	300
FP 55/75 4S	58	22 (± 11)	63	158	75	30	300

* no continuous use

For installation in asphalt, please ask for our technical advice.

Larger installation heights on request.

Production length: 4 m

Standard colours: black, grey, beige

Wall connections: E1, E3, E4

