


# FP 65

FOR FLOORS AND WALLS

# MIGUTEC

JOINT COVERS FOR EXPANSION JOINTS

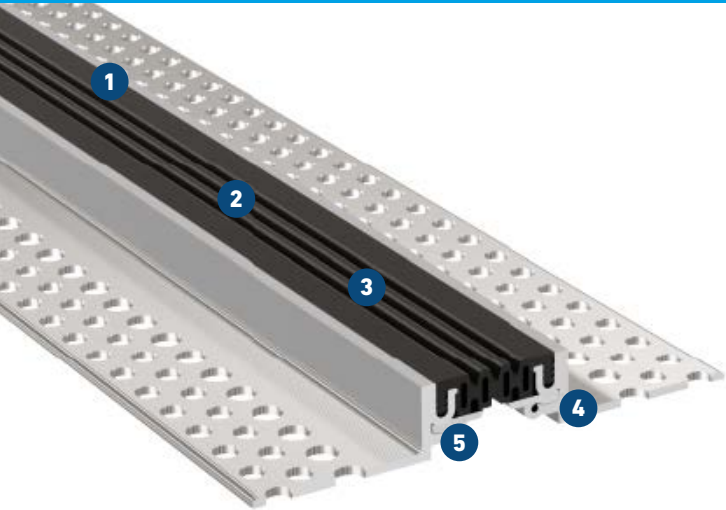

- 1 Flexible high quality elastomeric insert**  
Hard wearing, temperature resistant (-30°C to +120°C), replaceable
- 2 Insert and horizontal support plates replaceable**  
with series FP 85 and FP 105
- 3 Multi directional movement**
- 4 High load capacity due to sturdy construction**  
Solid aluminium brackets
- 5 Quick and easy installation**  
Positive connection of production lengths by means of connection pieces

Expansion joint cover	Joint width $b_f$ max [mm]	Total movement $\Delta b_f$ [mm]	Visible width $b_s$ [mm]	Joint width total $b_t$ [mm]	Joint height $h$ [mm]	Load bearing capacity [kN]	Load bearing capacity* [kN]
FP 65/20	55	22 ( $\pm 11$ )	65	205	20	30	300
FP 65/30	55	22 ( $\pm 11$ )	65	205	30	30	300
FP 65/50	55	22 ( $\pm 11$ )	65	205	50	30	300

No continuous use

All information on load bearing capacity does only apply to non-floating floors.  
For installation in asphalt, please ask for our technical advice.

**Production length:** 4 m

**Standard colors:** black, grey, beige

