


FP 65 NI / FP 65 MS

WITH CAPPINGS MADE OF STAINLESS STEEL OR BRASS

MIGUTEC

JOINT COVERS FOR EXPANSION JOINTS

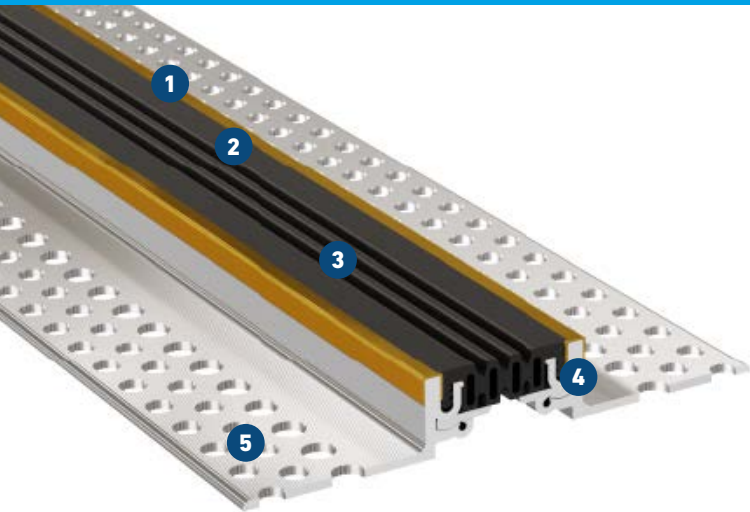

- 1 Visible surface brass or stainless steel**
- 2 Flexible high quality elastomeric insert**
Hard wearing, temperature resistant (-30°C to +120°C), replaceable
- 3 Multi directional movement**
- 4 High load capacity due to sturdy construction**
Solid aluminium brackets
- 5 MultiHole mounting bracket**
for secure fixing
- 6 Quick and easy installation**
Positive connection of production lengths by means of connection pieces

Expansion joint cover	Joint width $b_f \text{ max}$ [mm]	Total movement Δb_f [mm]	Visible width b_s [mm]	Joint width total b_t [mm]	Joint height h [mm]	Load bearing capacity	
						[kN]	[kN]
FP 65/21 NI	55	22 (± 11)	67	205	21	30	300
FP 65/31 NI	55	22 (± 11)	67	205	31	30	300
FP 65/51 NI	55	22 (± 11)	67	205	51	30	300
FP 65/21 MS	55	22 (± 11)	67	205	21	30	300
FP 65/31 MS	55	22 (± 11)	67	205	31	30	300
FP 65/51 MS	55	22 (± 11)	67	205	51	30	300

No continuous use

All information on load bearing capacity does only apply to non-floating floors.

For installation in asphalt, please ask for our technical advice.

Production length: 4 m

Standard colors: black, grey

