


ES 60


FOR HEAVY DUTY FLOORS, RESISTANT TO AGGRESSIVE FLUIDS

MIGUTEC

JOINT COVERS FOR EXPANSION JOINTS

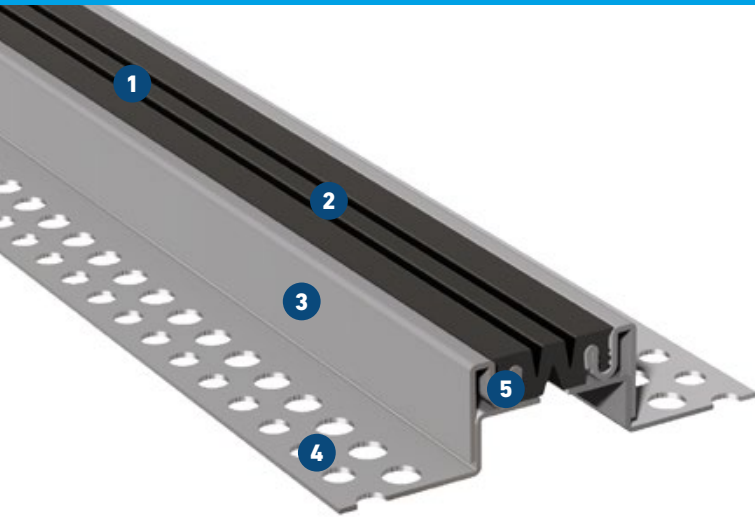

- 1 Flexible high quality elastomeric insert**
Hard wearing, temperature resistant (-30°C to +120°C), replaceable
- 2 Multi directional movement**
- 3 Solid stainless steel brackets**
Resistant to aggressive media (e.g. sea water)
- 4 MultiHole mounting bracket**
for secure fixing
- 5 High load capacity**
suitable for Forklift trucks

Expansion joint cover	Joint width $b_f \text{ max}$ [mm]	Total movement Δb_f [mm]	Visible width b_s [mm]	Joint width total b_t [mm]	Joint height h [mm]	Load bearing capacity*  [kN]	Load bearing capacity  [kN]
ES 60/19	40	16(+10/-6)	60	160	19	90	35
ES 60/35	50	16(+10/-6)	60	152	35	90	35

* no continuous use

Larger installation heights on request.

Material: 1.4401 (alloy 316)

Production length: 4 m

Standard colors: black, grey. Stainless steel: mill finish.

