
MIGUTEC

ININT COVERS FOR EXPANSION ININTS

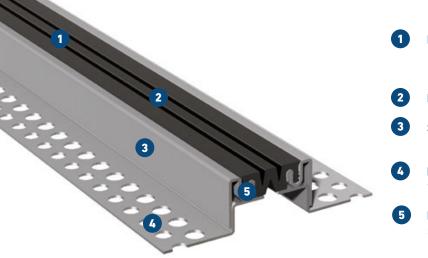

1 Flexible high quality elastomeric insert Hard wearing, temperature resistant (-30°C to +120°C), replaceable

- 2 Multi directional movement
- 3 Solid stainless steel brackets
 Resistant to aggressive media (e.g. sea water)
- MultiHole mounting bracket for secure fixing
- **High load capacity** suitable for Forklift trucks

Expansion joint cover	Joint width	Total movement	Visible width	Total width	Joint height	Load bearing capacity*	Load bearing capacity
	bf max [mm]	Δbf [mm]	b _s [mm]	bt [mm]	h [mm]	[kN]	[kN]
ES 60/19	40	16 (+10/-6)	60	160	19	90	35
ES 60/35	50	16 (+10/-6)	60	152	35	90	35

^{*} no continuous use

Larger installation heights on request.

Expansion joint covers from height 35 mm are supplied with a single-hole row and pre-drilled fixing holes.

Material: 1.4401 (alloy 316)
Production length: 4 m
Standard colours: black, grey
Stainless steel: mill finish
Wall connections: E3, E4

