
MIGUTEC

IOINT COVERS FOR EXPANSION JOINTS

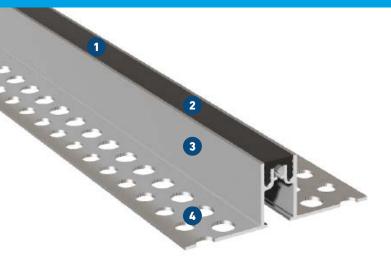

Flexible high quality elastomeric insert
Hard wearing, temperature resistant (-30°C to +120°C),
replaceable

Smooth visible surface for easy cleaning
Antibacterial and physiologically safe

Quick and easy installation
Solid, but light aluminium brackets for quick installation in screed or tiled floorings

MultiHole mounting bracket for secure fixing

Expansion joint cover	Joint width	Total movement	Visible width	Joint width total	Joint height	Load bearing capacity*
	bf max [mm]	Δb _f [mm]	b _s [mm]	bt [mm]	h [mm]	[kN]
FLG 21/20	20	2 (± 1)	21	107	20	30
FLG 21/35	20	2 (± 1)	21	111	35	30
FLG 21/50	20	2 (± 1)	21	111	50	30

No continuous use

All information on load bearing capacity does only apply to non-floating floors.

For installation in asphalt, please ask for our technical advice.

Production length: 4 m **Standard colors:** black, grey

