


# FPG 55

FOR FLOORS AND WALLS WITH HYGIENIC REQUIREMENTS

# MIGUTEC

JOINT COVERS FOR EXPANSION JOINTS

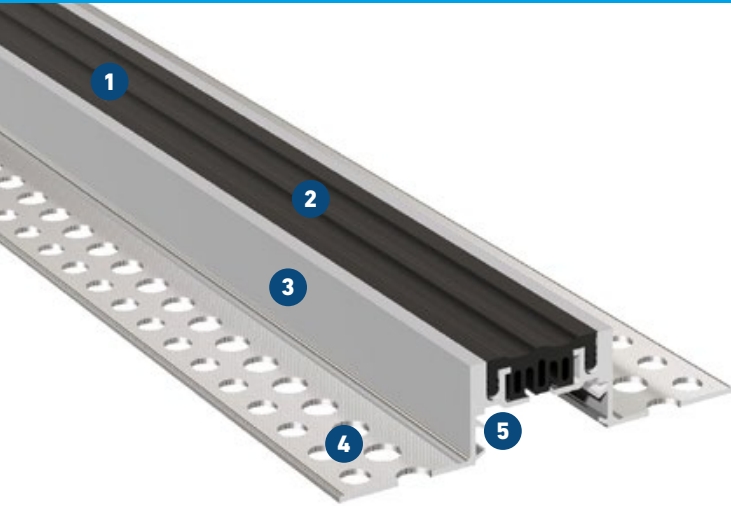

- 1 Flexible high quality elastomeric insert**  
Hard wearing, temperature resistant (-30°C to +120°C), replaceable
- 2 Smooth visible surface for easy cleaning**  
Antibacterial and physiologically safe
- 3 High load capacity due to sturdy construction**  
Solid aluminium brackets
- 4 MultiHole mounting bracket**  
for secure fixing
- 5 Quick and easy installation**  
Solid, but light aluminium brackets for quick installation in screed or tiled floorings

Expansion joint cover	Joint width	Total movement	Visible width	Total width	Joint height	Load bearing capacity	Load bearing capacity*
	$b_f \text{ max}$ [mm]	$\Delta b_f$ [mm]	$b_s$ [mm]	$b_t$ [mm]	$h$ [mm]	[kN]	[kN]
FPG 55/20	50	8 (±4)	55	150	20	30	300
FPG 55/25	50	8 (±4)	55	150	25	30	300
FPG 55/35	50	8 (±4)	55	150	35	30	300
FPG 55/50	50	8 (±4)	55	150	50	30	300
FPG 55/75	50	8 (±4)	55	150	75	30	300

\* no continuous use

For installation in asphalt, please ask for our technical advice.

Larger installation heights on request.

**Production length:** 4 m

**Standard colours:** black, grey, beige

**Wall connections:** E1, E3, E4

