
MIGUTEC

IOINT COVERS FOR EXPANSION JOINTS.

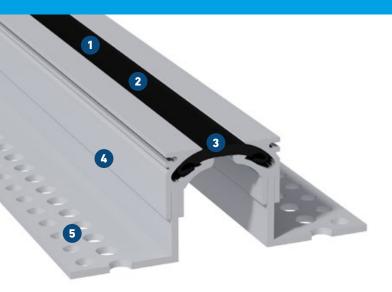

- Ultra-smooth insert for residue-free cleaning
 Thus optimal sterility and physiologically safe
- 2 Seamless, symmetrical visible surface
 Hard-wear special insert for smoother, low-noise transit
- 3 Innovative solution
 Suitable for hospital-typical vehicles, such as hospital beds and food trolleys
- High load capacity due to sturdy construction Solid aluminium brackets
- Secure fixing due to MultiHole mounting bracket Flexible anchoring and excellent bond

Ideal for use with various types of floor covering

Expansion joint cover	Joint width	Total movement	Visible width	Total width	Joint height	Load bearing capacity*	Load bearing capacity*
						~~ •	~ ~
	bf max [mm]	Δbf [mm]	b_S [mm]	bt [mm]	h [mm]	[kN]	[kN]
FGH 65/38	50	20 (±10)	65	148	38	30	300
FGH 65/50	50	20 (±10)	65	171	50	30	300
FGH 65/60	50	20 (±10)	65	171	60	30	300
FGH 65/70	50	20 (±10)	65	171	70	30	300

^{*} no continuous use

All information on load bearing capacity does only apply to non-floating floors.

For installation in asphalt, please ask for our technical advice.

Larger installation heights on request.

Production length: 3 m Standard colours: black, grey Wall connections: E3, E4

