


FB 20

FOR PRECAST CONSTRUCTION AND FAIR-FACED IN-SITU CONCRETE

MIGUTEC

JOINT COVERS FOR EXPANSION JOINTS

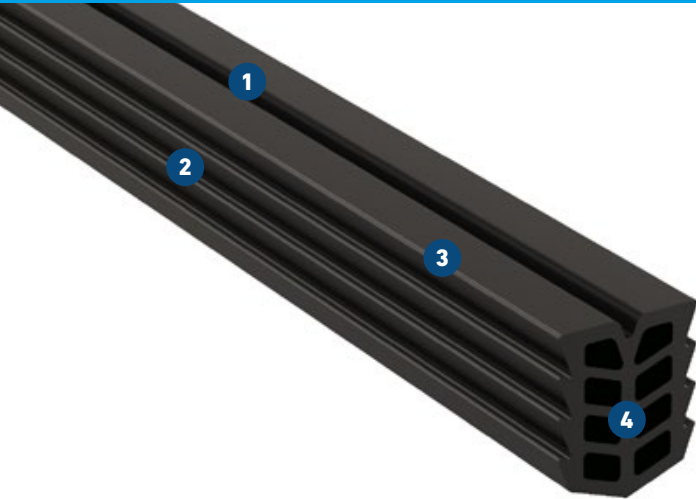


- 1 High quality EPDM material**
Hard wearing, temperature resistant (-30°C to +120°C)
- 2 Easy installation, secure fixing and good surface pressure**
by special design of the side barbs
- 3 High durability**
due to excellent permanent elasticity of EPDM material
- 4 Excellent sound and thermal insulation**
due to speciall cellular design of the expansion joint


Expansion joint cover	Joint width required b_s [mm]	Total movement [mm]	Joint depth h_2 [mm]
FB 20/1518	10	6	25
FB 20/1820	12	6	25
FB 20/2122	15	7	30
FB 20/2422	18	7	30
FB 20/3028	20	12	35
FB 20/4030	28	14	45
FB 20/5038	35	20	55
FB 20/6048	45	20	65

Production length: 20 m
Standard colours: black, grey


FB 20/1518



FB 20/1820




FB 20/2122



FB 20/2422



FB 20/3028



FB 20/4030



FB 20/5038



FB 20/6048

