
MIGUTRANS

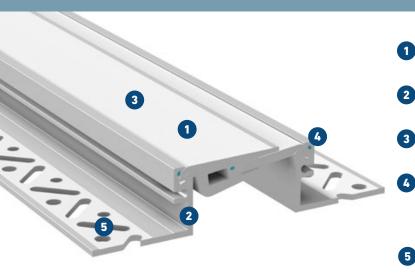

New, improved design Innovative layout of the line

Solid all-metal expansion joint

hard wearing, maintenance-free, long lasting **Striated surface**

ensures good skid resistance

Articulated telescoping system with optimized movement control

absorbs movement in 3 directions, with improved shock absorbing elements

5

Punctured leg with MIGUA mounting matrix® Provides optimal anchoring alternatives in the underground

Now available Anodized!

For perfect match with interior design. Different colours can be combined. Color-fast and light resistant.

Expansion joint cover	Joint width max.	Total movement	Visible width	Total width	Joint height	Load bearing capacity	Load bearing capacity	Load bearing capacity
	b f [mm]	Δb_f [mm]	b_s [mm]	b_t [mm]	h [mm]	[kN]	[kN]	tyres [kg/mm]
FSX 110/22 *	75	30 (±15)	110	231	22	300	130	10
FSX 110/30	75	30 (±15)	110	231	30	300	130	10
FSX 110/40	75	30 (±15)	110	231	40	300	130	10
FSX 110/50	75	30 (±15)	110	231	50	300	130	10
FSX 110/60	75	30 (±15)	110	231	60	300	130	10
FSX 110/80	75	30 (±15)	110	231	80	300	130	10
FSX 110/100	75	30 (±15)	110	231	100	300	130	10

* Minimum joint width 75 mm

Production length: 4 m

Standard colour: Aluminium, available in anodized version, too

Further installation heights on request. Applicable for anodized expansion joint covers:

By anodizing the surface is hardened, but scratches can not be ruled out under mechanical stress of the profiles.

Slight color and / or gloss deviations between different batches or deliveries do not constitute a reason for complaint.

The processing is carried out in accordance with DIN 17611 and the Qualanod (Quality Label for Sulphuric Acid-Based Anodizing of Aluminium) regulations for the anodization of aluminum.

The expansion joint covers must be cleaned and maintained in accordance with the specifications of the Qualanod and the leaflet A5 of the aluminum center.

We are happy to advise you. **Standard colors based on EURAS** color fans:

C 0 Nature C 31 Light C 32 Light bronze Other colors on request.

