
MIGUTRANS

HEAVY-DUTY ALL-METAL JOINT SOLUTIONS FOR LARGE TRAFFIC LOADS

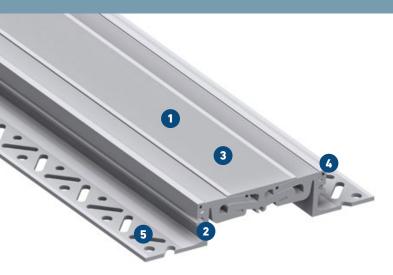

1 New, improved design
Innovative layout of the line

2 Solid all-metal expansion joint hard wearing, maintenance-free, long lasting

3 Striated surface ensures good skid resistance

Articulated telescoping system with optimized movement control

absorbs movement in 3 directions, with improved shock absorbing elements

Provides optimal anchoring alternatives in the underground

Now available Anodized!

For perfect match with interior design. Different colours can be combined. Color-fast and light resistant.

Expansion joint cover	Joint width max. bf [mm]	Total movement Abf [mm]	Visible width bs [mm]	Total width bt [mm]	Joint height h [mm]	Load bearing capacity	Load bearing capacity	Load bearing capacity solid plastic tyres [kg/mm]
FSX 155/30	120	40 (±20)	156	227	30	600	130	15
FSX 155/50	120	40 (±20)	156	227	50	600	130	15

* Minimum joint width 120 mm

Production length: 4 m **Standard colour:** Aluminium

Larger installation heights on request.

Applicable for anodized expansion joint covers:

By anodizing the surface is hardened, but scratches can not be ruled out under mechanical stress of the profiles.

Slight color and / or gloss deviations between different batches or deliveries do not constitute a reason for complaint.

The processing is carried out in accordance with DIN 17611 and the Qualanod (Quality Label for Sulphuric Acid-Based Anodizing of Aluminium) regulations for the anodization of aluminum.

The expansion joint covers must be cleaned and maintained in accordance with the specifications of the Qualanod and the leaflet A5 of the aluminum center.

We are happy to advise

you.

Standard colors based on

EURAS color fans:

C 0 Nature
C 31 Light
C 32 Light bronze

Other colors on request.

