


# FP 55 - 4S

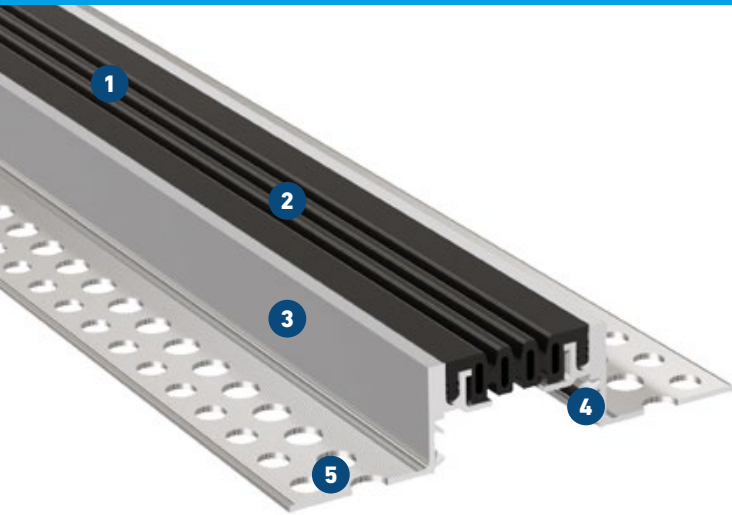

FOR FLOORS AND WALLS

# MIGUTEC

JOINT COVERS FOR EXPANSION JOINTS



- 1 Flexible high quality elastomeric insert**  
Hard wearing, temperature resistant (-30°C to +120°C), replaceable
- 2 Multi directional movement**
- 3 High load capacity due to sturdy construction**  
Solid aluminium brackets
- 4 Quick and easy installation**  
Positive connection of production lengths by means of connection pieces
- 5 MultiHole mounting bracket**  
for secure fixing

Expansion joint cover	Joint width	Total movement	Visible width	Joint width total	Joint height	Load bearing capacity  [kN]	Load bearing capacity*  [kN]
	$b_f \text{ max}$ [mm]	$\Delta b_f$ [mm]	$b_s$ [mm]	$b_t$ [mm]	$h$ [mm]		
FP 55/20 4S	58	22 ( $\pm 11$ )	63	158	20	30	300
FP 55/25 4S	58	22 ( $\pm 11$ )	63	158	25	30	300
FP 55/35 4S	58	22 ( $\pm 11$ )	63	158	35	30	300
FP 55/50 4S	58	22 ( $\pm 11$ )	63	158	50	30	300
FP 55/75 4S	58	22 ( $\pm 11$ )	63	158	75	30	300

\* no continuous use

Larger installation heights on request.

For installation in asphalt, please ask for our technical advice.

**Production length:** 4 m

**Standard colors:** black, grey, beige

