


# FP 55 NI

WITH CAPPINGS MADE OF STAINLESS STEEL

# MIGUTEC

JOINT COVERS FOR EXPANSION JOINTS

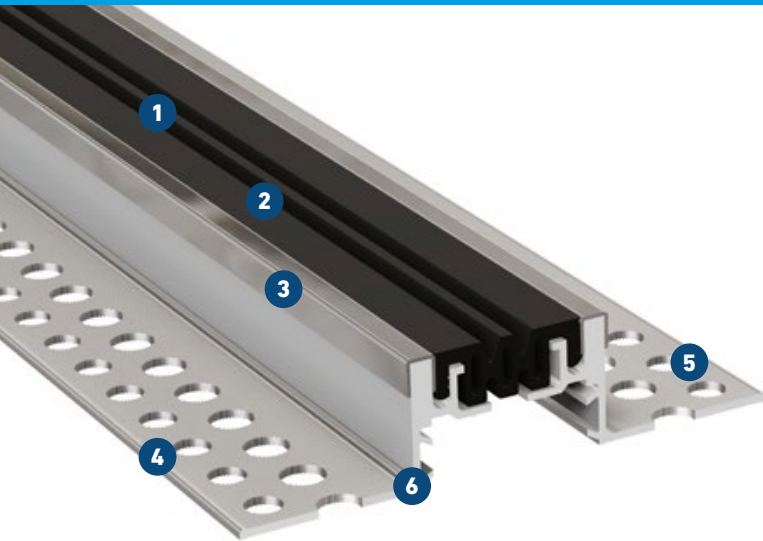

- 1 Flexible high quality elastomeric insert**  
Hard wearing, temperature resistant (-30°C to +120°C), replaceable
- 2 Multi directional movement**
- 3 Visible surface in stainless steel**
- 4 High load capacity due to sturdy construction**  
Solid aluminium brackets
- 5 MultiHole mounting bracket**  
for secure fixing
- 6 Quick and easy installation**  
Positive connection of production lengths by means of connection pieces

Expansion joint cover	Joint width	Total movement	Visible width	Joint width total		Joint height	Load bearing capacity	Load bearing capacity*
	$b_f \text{ max}$ [mm]	$\Delta b_f$ [mm]	$b_s$ [mm]	$b_t$ [mm]	$b_t$ [mm]	$h$ [mm]	[kN]	[kN]
FP 55/21 NI	50	16 (± 8)	57	150	150	21	30	300
FP 55/26 NI	50	16 (± 8)	57	150	150	26	30	300
FP 55/36 NI	50	16 (± 8)	57	150	150	36	30	300
FP 55/51 NI	50	16 (± 8)	57	150	150	51	30	300
FP 55/76 NI	50	16 (± 8)	57	150	150	76	30	300

\* no continuous use

Larger installation heights on request.

For installation in asphalt, please ask for our technical advice.

**Production length:** 4 m

**Standard colors:** black, grey

