FN 110

FOR FLOORS – SURFACE FIXING

MIGUTEC

JOINT COVERS FOR EXPANSION JOINTS

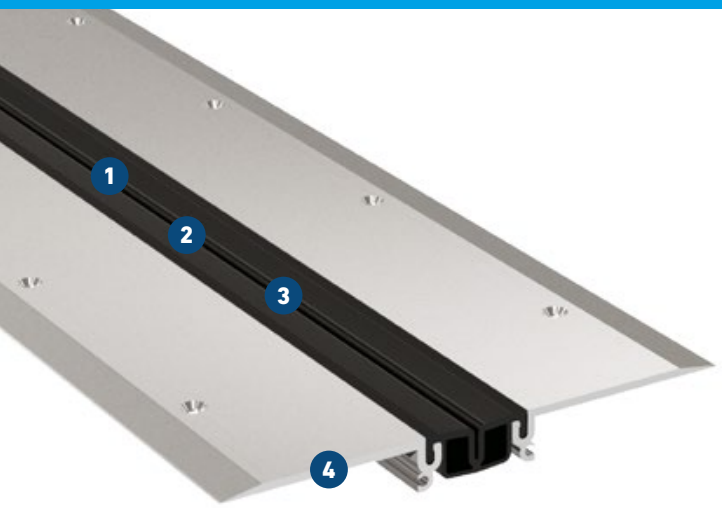

1. **Anti slip surface ensures good skid resistance**
   Special striated surface, also suitbale for sports areas
2. **Flexible MIGUFLEX insert**
   Hard wearing, temperature resistant (-30°C to +120°C)
3. **Economical**
   Insert replaceable at any time
4. **Very flat design**
   Perfect for surface fixing

Expansion joint cover	Total movement Δb_f [mm]	Total width b_t [mm]	Joint width required $b_{f\,min}$ [mm]	Width of insert b_s [mm]	Installation height h [mm]	Thickness of alu side plates [mm]	Load bearing capacity [kN]
FN 110	60 (±30)	311	75	64	40	6,3	35

Installation instructions: Any unevenness in the surface to which the joint cover is being fixed must be remedied by using an epoxy adhesive e.g. Reckli-Adhesive EP. Thereafter the aluminium brackets must be fixed on both sides with countersunk stainless steel screws e.g. Multi Monti type MMS-7,5 ES or similar, at 200 mm intervals.
Production length: 4 m
Standard colour: black
Wall connections: E3, E4

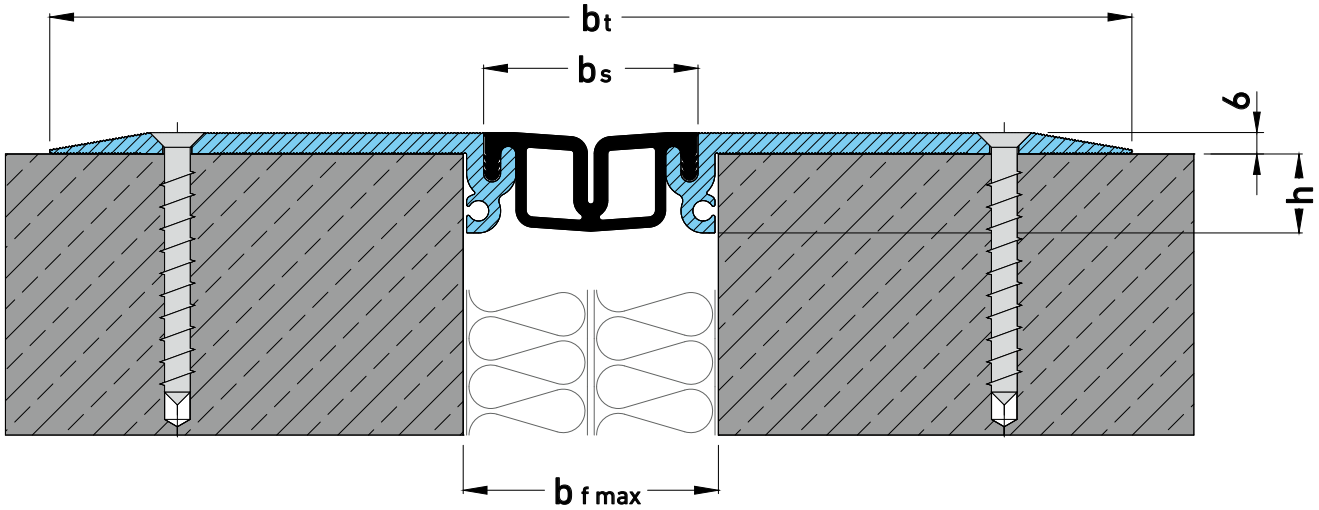

www.migua.com | info@migua.com
01/2026 – Subject to technical changes without notice

MIGUA®