


D 15 / DE 15

FOR WALLS AND CEILINGS WITH PLASTER AND TILES

MIGUTEC

JOINT COVERS FOR EXPANSION JOINTS

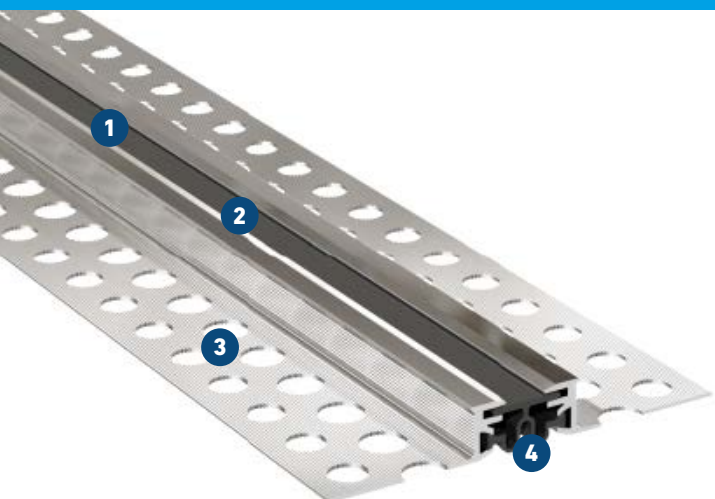

- 1 High quality elastomeric insert for in- and outdoors**
Hard wearing, temperature resistant (-30°C to +120°C), replaceable
- 2 Large movement capacity**
Special flexible folded insert (up to 50 m length)
- 3 MultiHole mounting bracket**
for secure fixing
- 4 Double protection against water**
Due to double sliding of the sealing insert within metal joint covers


Standard version	Joint width $b_f \text{ max}$ [mm]	Total movement Δb_f [mm]	Visible width b_s [mm]	Joint width total b_t [mm]	Joint height h [mm]
D 15/3	30	10 (± 5)	32	110	15
D 15/5	75	40 (± 20)	75	155	15
D 15/7	100	50 (± 25)	100	180	15
D 15/9	150	100 (± 50)	150	230	15
D 15/13	200	100 (± 50)	200	280	15
D 15/14	250	180 (± 90)	250	330	15
D 15/18	350	200 (± 100)	350	430	15

Corner version	Joint width $b_f \text{ max}$ [mm]	Total movement Δb_f [mm]	Visible width b_s [mm]	Joint width total b_t [mm]	Joint height h [mm]
DE 15/4	30	10 (± 5)	22	76	15
DE 15/6	75	40 (± 20)	55	114	15
DE 15/8	100	50 (± 25)	80	139	15
DE 15/11	150	100 (± 50)	125	189	15
DE 15/15	200	120 (± 60)	190	239	15
DE 15/16	250	180 (± 90)	220	289	15
DE 15/22	350	200 (± 100)	390	389	15

Production length: 4 m

Standard colours: Grey. DE 15/3 and DE 15/4 also available in Beige.

www.migua.com | info@migua.com
09/2017 – Subject to technical changes without notice

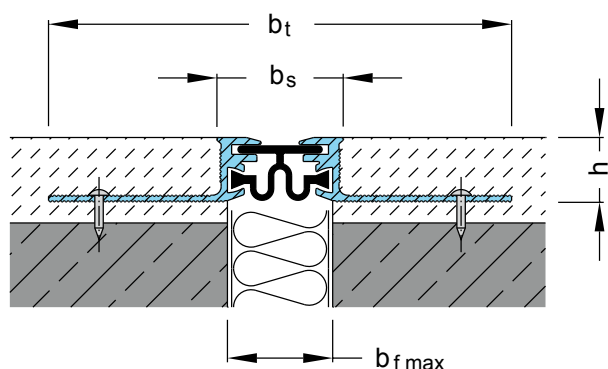

Insert for joint D 15/3 and DE 15/4



Insert for joint D 15/5 and DE 15/6



Insert for joints D 15/7 and DE 15/8



Insert for joint D 15/9 and DE 15/11



Insert for joints D 15/13 and DE 15/15